

PRATT COMBINATION 316SS SHOWER TRIPLE NOZZLE EYE & FACE WASH WITH BOWL & FOOT TREADLE

This combination shower model is constructed mainly of 316 stainless steel, including stanchion, ball valves, bowl assembly, foot treadle and shower head. AES plastic eye-face wash nozzles with triple aerators and self-closing dust cover. It is suitable for both indoor and outdoor applications where a higher grade of stainless steel is required for add corrosion resistance.

The shower outlet also includes a 90LPM flow regulator, and the eye-face wash incorporates individual flow adjustment to provide a balanced flow output.



Shower Head



Flow Regulator



Eye-Face Wash Nozzles



Aerator Assembly



Foot Treadle



OPTIONAL ACCESSORIES:





- Anti Scald and Anti Freeze Valve Kits
- Thermal Insulation
- Audible and Visual Alarm Kits
- Green Fluoro Light Kits
- Shower Test Kits
- Safety Signs
- Mounting Brackets
- Custom Modifications

PRATT COMBINATION 316SS SHOWER TRIPLE NOZZLE EYE & FACE WASH WITH BOWL & FOOT TREADLE

TECHNICAL DRAWINGS AND SPARE PARTS


SPARE PARTS COMPONENTS:

ITEM	PART NO.	DESCRIPTION	MATERIAL
1	SE850	Shower Head	316SS
2	531038T316	Pull Rod	316SS
3	531144T316	Shower Arm	316SS
4	SE911	25mm Ball Valve & Lever Arm	316SS
5	531128T316	Upper Shower Stanchion	316SS
6	531039T316	Lower Shower Stanchion	316SS
7	531018	15mm Ball Valve	316SS
8	511328	Manifold T Assembly	316SS
9	531108T316	Bowl Assembly	316SS
10	531020T316	Push Handle	316SS
11	520129WH	Right Braided Hose & Elbow Base	316SS
12	520130WH	Left Braided Hose & Elbow Base	316SS
13	511700	Screen Filter Mesh (pk 6)	316SS
14	531131	Eye Wash Nozzles (complete)	AES Plastic
15	05-1177	Aerator Screen Assembly (ea)	SS & Brass
16	531113	Dust Cover	AES Plastic
17	PFCA90	Flow Regulator & Housing	Acetyl / Polypropylene
18	531121	Drain Spud Connector & Hex Key	316SS

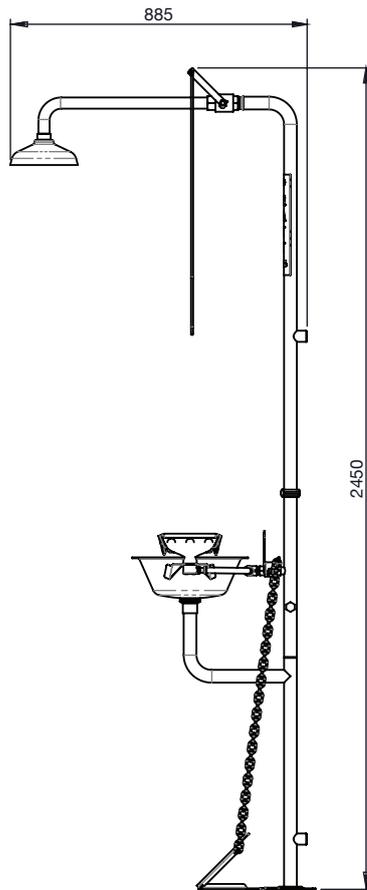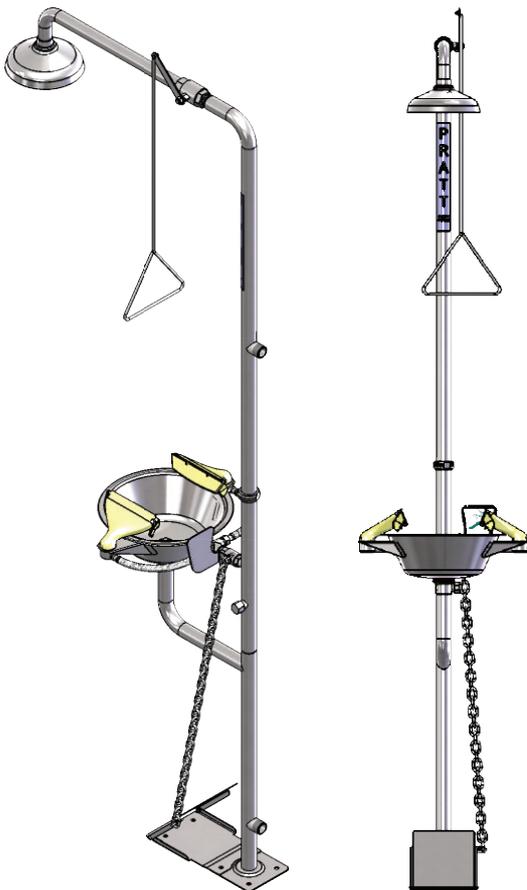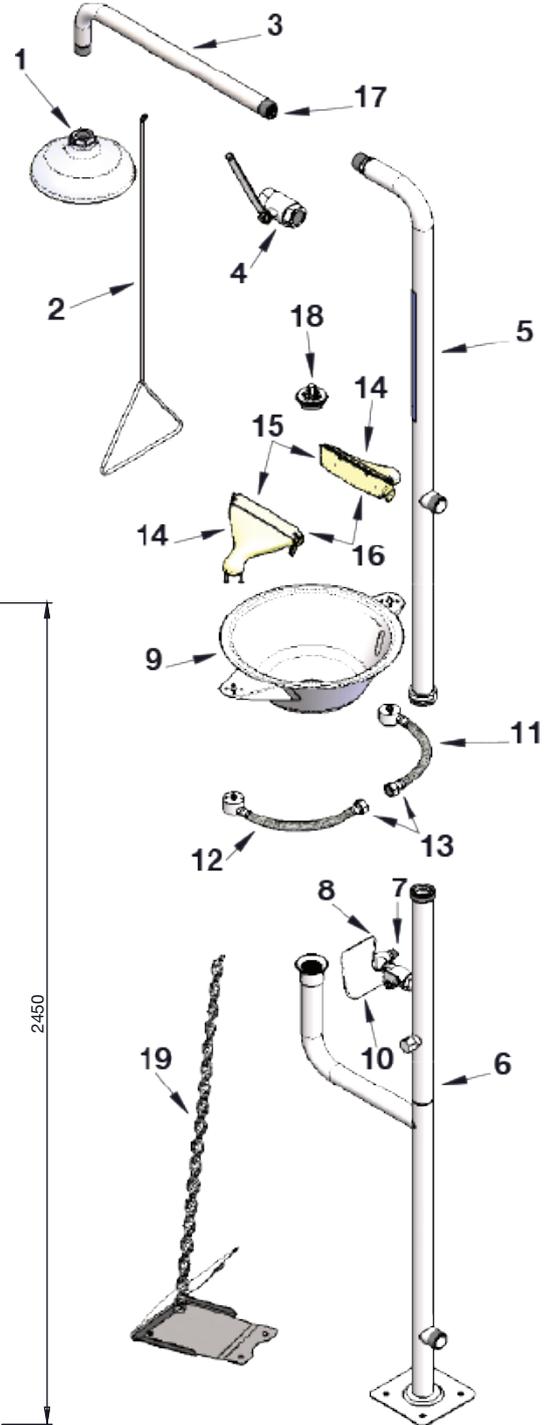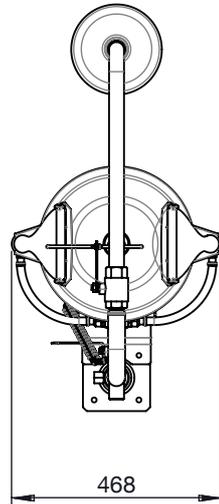

Inlet and Outlet Connections: 25mm BSPM
Recommended:
Minimum Supply Connection: 25mm
Minimum Water Supply: 140-150 LPM @ 210kPa

4 ANCHOR HOLES Ø11



FLOOR MOUNTING PLATE